



The SL-500

Mostly used in standard PCs or as an exchange power supply the **SL-500** has thousands of satisfied customers.

Equipped with 3x S-ATA, 20+4 and 4+4 connectors they suit perfectly to every home and office system. And a super silent fan guarantees a noiseless working.

Specifications


Output	500W
Mainboard 20+4Pin	1x
4Pin/ 4+4Pin/ 8Pin 12V	-/•/-
PCI-Express 6+2Pin	-
PCI-Express 6Pin	-
IDE 4Pin	2x
S-ATA	3x
Floppy	1x
Fan Monitoring	-
115/230V Input	-/•
PFC	Passive
ATX-Standard	ATX 2.03
Fan Dimensions	120mm
Fan Control	Auto.
Noise Level	19-25dB
Cable Management	-
Protection Circuit	OVP, SCP, OPP, OCP, UVP, OS
PSU Dimensions (H/W/D)	86/150/140mm
Package Dimensions (H/W/D)	155/225/95mm
Weight (net)	1.14Kg
Weight (gross)	1.46Kg
Packing Units (VE/VPE/PAL)	1/10/280
Guarantee and Warranty	24 Months Guarantee
Article Number	88882009
EAN-Code	4260133120891
Scope of delivery	power cable, manual
80+ Certificate	-

- = existing
- = non existing

Certification:



Connectors

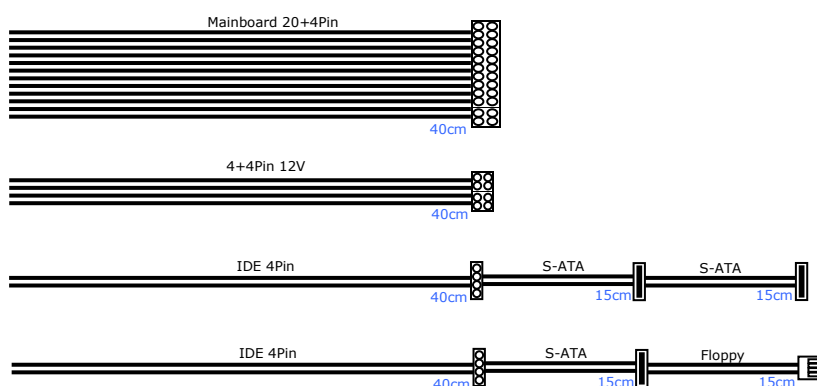

AC Input		230V 3A 50-60Hz				
DC Output		3.3V	5V	12V1	-12V	5Vsb
SL-500	Max. Current	15A	16A	30A	0.8A	2.5A
	Max. Combined Power	120W		360W	9.6	12.5
		500W				